



Compiler Design

Lexical Analysis

The Role of Lexical Analyzer

conf. dr. ing. Ciprian-Bogdan Chirila

chirila@cs.upt.ro

<http://www.cs.upt.ro/~chirila>

Outline


- Lexical Analysis vs. Parsing
- Tokens, Patterns and Lexemes
- Attributes for Tokens
- Lexical Errors

Lexical Analysis

- Manual approach – by hand
 - To make a diagram for the lexeme of each token
 - To identify the occurrence of each lexeme
 - To return the information about the identified token
- Automatic approach - lexical-analyzer generator
 - Compiles lexeme patterns into code that functions as a lexical analyzer
 - e.g. Lex, Flex, JavaCC, ANTLR, JLex, Jflex, C# Lex, C# Flex,...
 - Steps
 - Regular expressions - notation for lexeme patterns
 - Nondeterministic automata
 - Deterministic automata
 - Driver - code which simulates automata

The Role of the Lexical Analyzer

- Read input characters
- To group them into lexemes
- Produce as output a sequence of tokens
 - input for the syntactical analyzer
- Interact with the symbol table
 - Insert identifiers

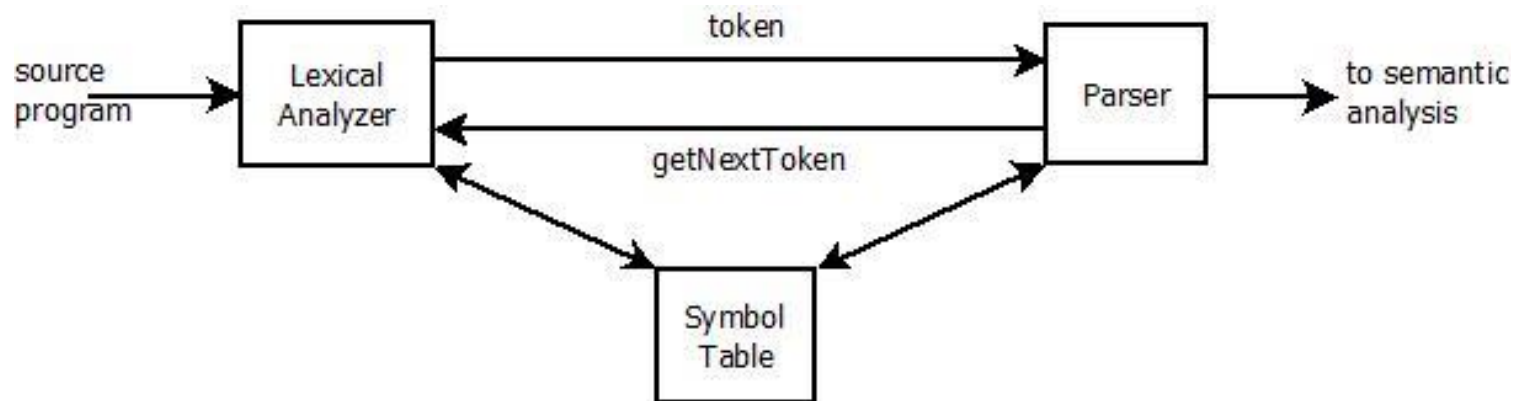

The Role of the Lexical Analyzer

- to strip out
 - comments
 - whitespaces: blank, newline, tab, ...
 - other separators
- to correlate error messages generated by the compiler with the source program
 - to keep track of the number of newlines seen
 - to associate a line number with each error message

Lexical Analyzer Process

- Scanning
 - to not require input tokenization
 - deletion of comments
 - compaction of consecutive white spaces into one
- Lexical analysis
 - to produce sequence of tokens as output

Lexical Analysis vs. Parsing

- **Simplicity of design**
 - Separation of lexical from syntactical analysis -> simplify at least one of the tasks
 - e.g. parser dealing with white spaces -> complex
 - Cleaner overall language design
- **Improved compiler efficiency**
 - Liberty to apply specialized techniques that serves only lexical tasks, not the whole parsing
 - Speedup reading input characters using specialized buffering techniques
- **Enhanced compiler portability**
 - Input device peculiarities are restricted to the lexical analyzer

Tokens, Patterns, Lexemes

- Token - pair of:
 - token name – abstract symbol representing a kind of lexical unit
 - keyword, identifier, ...
 - optional attribute value
- Pattern
 - description of the form that the lexeme of a token may take
 - e.g.
 - for a keyword the pattern is the character sequence forming that keyword
 - for identifiers the pattern is a complex structure that is matched by many strings
- Lexeme
 - a sequence of characters in the source program matching a pattern for a token

Examples of Tokens

Token	Informal Description	Sample Lexemes
if	characters i, f	if
else	characters e, l, s, e	else
comparison	< or > or <= or >= or == or !=	<=, !=
id	Letter followed by letters and digits	pi, score, D2
number	Any numeric constant	3.14159, 0, 02e23
literal	Anything but “, surrounded by “	“core dumped”

Examples of Tokens

- One token for each keyword
 - Keyword pattern = keyword itself
- Tokens for operators
 - Individually or in classes
- One token for all identifiers
- One or more tokens for constants
 - Numbers, literal strings
- Tokens for each punctuation symbol
 - () , ;

Attributes for Tokens

- more than one lexeme can match a pattern
- token **number** matches 0, 1, 100, 77,...
- lexical analyzer must return
 - Not only the token name
 - Also an attribute value describing the lexeme represented by the token
- token **id** may have associated information like
 - lexeme
 - type
 - location – in order to issue error messages
- token **id** attribute
 - pointer to the symbol table for that identifier

Tricky Problems in Token Recognition

- Fortran 90 example

- assignment

DO 5 I = 1.25

DO5I = 1.25

- do loop

DO 5 I = 1,25

Example of Attribute Values

- $E = M * C ** 2$
 - <id, pointer to symbol table entry for E>
 - <assign_op>
 - <id, pointer to symbol-table entry for M>
 - <mult_op>
 - <id, pointer to symbol-table entry for C>
 - <exp_op>
 - <number, integer value 2>

Lexical Errors

- can not be detected by the lexical analyzer alone
 - **fi** (a == f(x)) ...
- lexical analyzer is unable to proceed
 - none of the patterns matches any prefix of the remaining input
 - “panic mode” recovery strategy
 - delete one/successive characters from the remaining input
 - insert a missing character into the remaining input
 - replace a character
 - transpose two adjacent characters

Bibliography

- Alfred V. Aho, Monica S. Lam, Ravi Sethi, Jeffrey D. Ullman – Compilers, Principles, Techniques and Tools, Second Edition, 2007